

Depend on Davey

DAVEY

APPLICATIONS

Ideal for swimming pool applications such as:

- Inground swimming pools
- Above ground swimming pools
- Swimming pools up to 300,000 litres




DAVEY
CrystalClear®

High Performance Cartridge Filters

The CrystalClear range has been specifically designed for the water-conscious filtration of water in swimming pools and spa pools.

WHY CHOOSE THE Davey CrystalClear Cartridge Filter?

- The filter lid is retained by a lock ring which enables easy access for element cleaning
- A.B.S. tank construction is robust, UV resistant and non corrosive for long life
- Low profile design means elements are easier to lift out for cleaning and require less height for installation
- The element is constructed of Du Pont Reemay which is recognised for its excellent filtration and long life
- A quality pressure gauge makes it easy to see when element cleaning is required
- A manual air bleed enables the filter to be de-pressurised before opening for cleaning
- A choice of two inlet ports enables the inlet plumbing to be installed at either 90 or 180° to the outlet for greater flexibility in installation
- A.B.S. Barrel unions are supplied to make installation simple
- Less water used, no backwashing needed
- Perfect for use with energy efficient pool pumps
- Easy to maintain and clean
- Replacement filter elements available

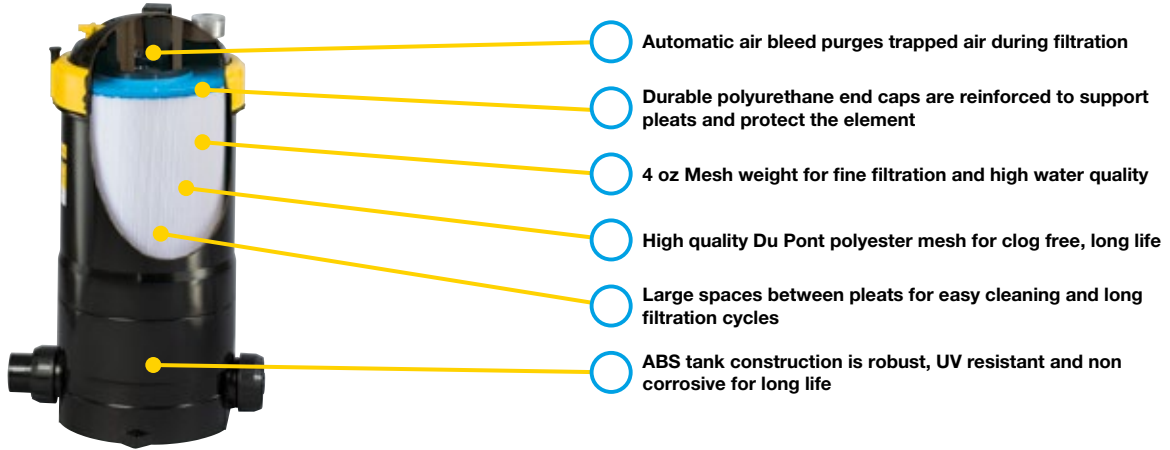

Type	Filtration Area (m ²)	Filtration Area (ft ²)	Maximum Flow Rate (lpm)	6 Hour Turnover* (litres)	8 Hour Turnover** (litres)
39050	4.65	50	205	73,800	98,400
39075	6.95	75	270	97,200	129,600
39100	9.29	100	340	122,400	163,200
39150	13.93	150	450	162,000	216,000
39175	16.25	175	540	194,400	259,200
39225	20.90	225	670	241,200	321,600

*Figure based on 6 hour turnover @12.5m head.

**Figure based on 8 hour turnover @12.5m head.

DIMENSIONS (mm)						
Type	A	B	C	D	Inlet PVC	Outlet PVC
39050	410	60	540	835	40/50*	40/50*
39025			540	835		
39100			635	1000		
39150			820	1360		
39175			905	1550		
39225			1110	1950		

OPERATING LIMITS	
Maximum water temperature	45°C
Maximum operating pressure	280kPa

Type	Replacement Filter Element
39050	Q2310
39075	Q2311
39100	Q2312
39150	Q2313
39175	Q2311 & Q2312
39225	Q2311 & Q2313

*40/50mm tail on unions allow connection of a DN40 PVC pipe or into the socket/collar of a DN50 PVC pipe.



davey.com.au | daveynz.co.nz | daveyeurope.eu | daveyusa.com

This literature is not a complete guide to product usage. All images provided in this document are for illustration purposes only. Further information is available from your Davey Dealer, Davey Support Centre and from the relevant product Installation and Operating Instructions. Must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice. © Davey is a registered trademark of Davey Water Products Pty Ltd. © Davey Water Products Pty Ltd 2016.